



SPARK

Smart Safe



Discover the seamless integration of safety, convenience and control




SPARK is designed to fit into a key position of the cash automation ecosystem by significantly increasing the efficiency in reconciling a till. Easily deposit cash into the multi-note automatic feed hopper and instantly authenticate, securely store, and accumulate all cash transactions. The addition of the Cloud solution allows remote tracking of every transaction by user and detailed reporting of totals by denomination including the ability to track serial numbers of each note. The risk of shrinkage is massively reduced and will bring any operation to another level of Cash Management!


4-Eye Principle

Safe of Smart Safe requires authorizations from 2 individuals to access.
In most cases, control center & CIT guard.

LOCK-1, CIT HQ OPENS REMOTELY
LOCK-2, CIT GUARD OPENS DIRECTLY

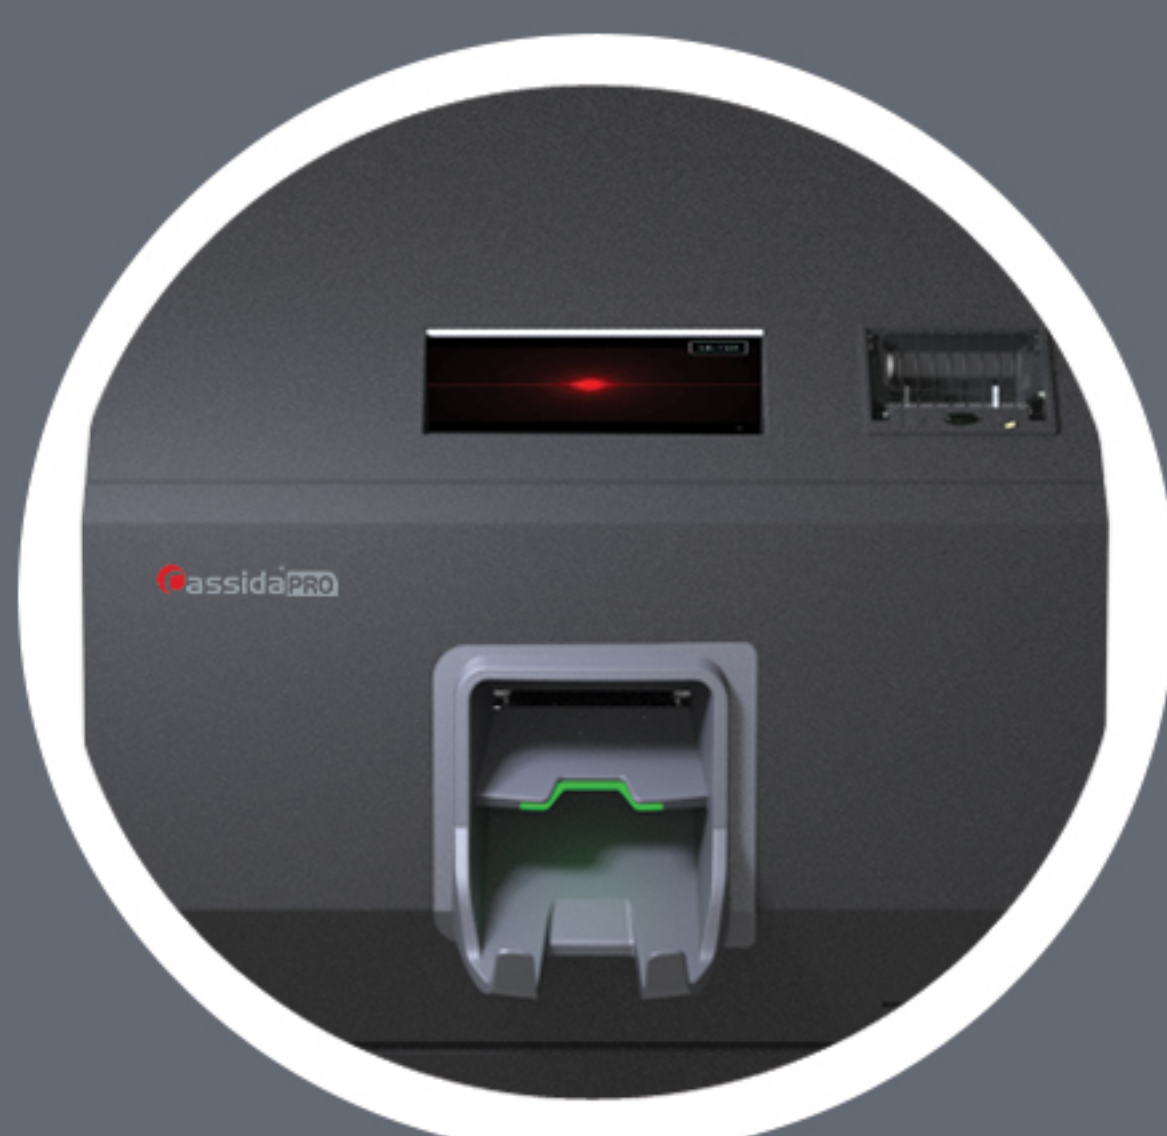

Bill Validator with bulk note feed

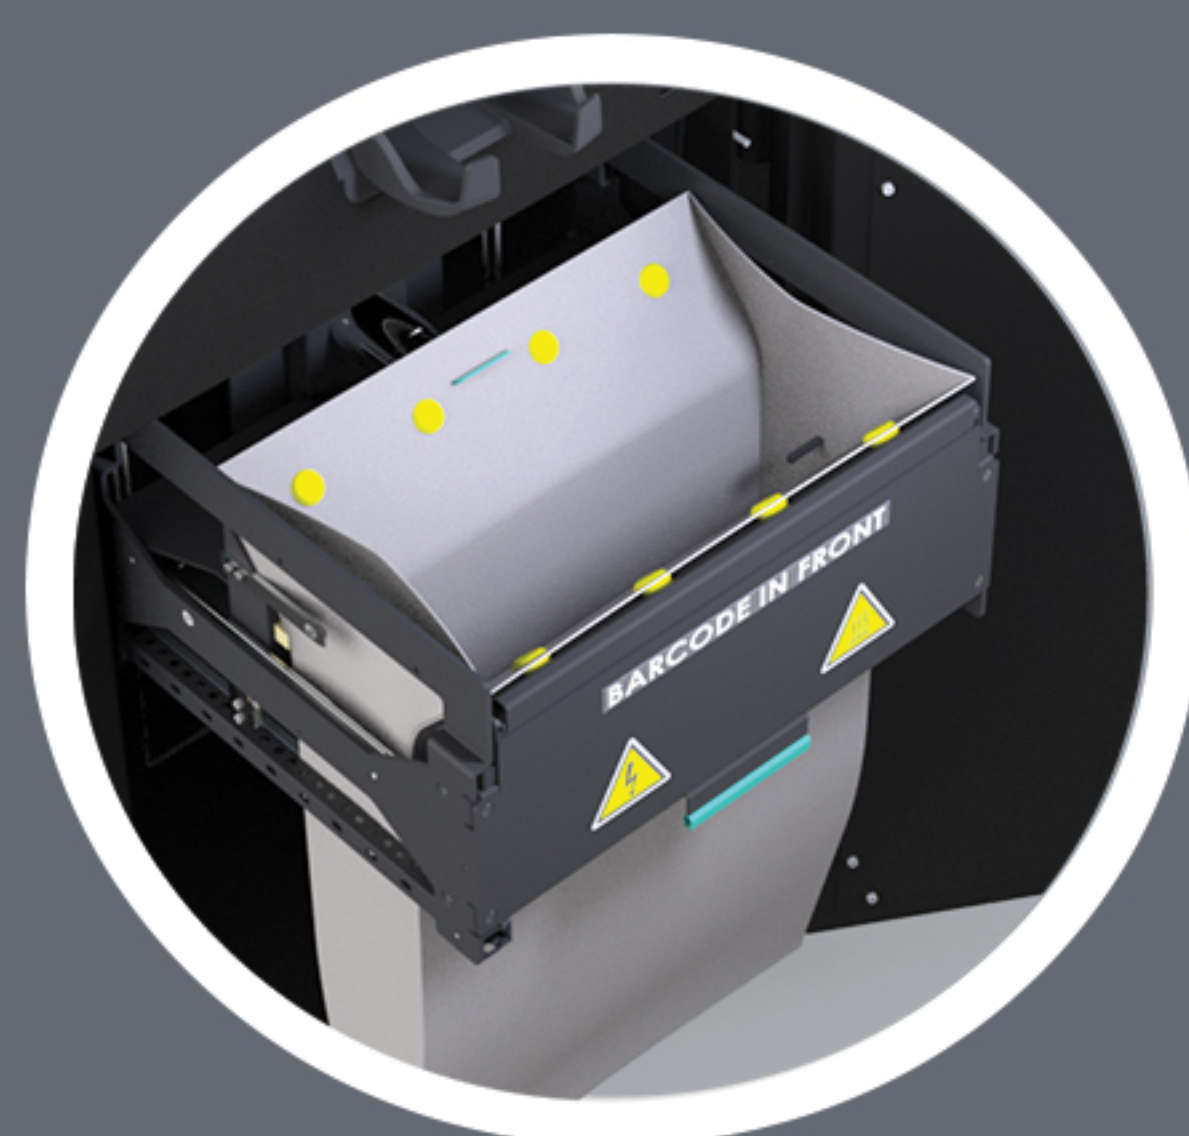

Automated bagging system



Electronic Lock



Touch Screen



Specifications

Operating System	Android / SPARK Application / Cloud
Feeding	Friction Roller, Auto Feeding
Acceptance Rate	99% or greater
Detection	Banknote Authentication Banknote SN Recognition
Capacity	50 Banknotes/Load (Banknote Validator) 4000 (Polymer Bag) 8000 (Canvas Bag)
Deposit Speed	3 Note/Sec.
Countable Note Size	60 x 85 x 0.08 mm ~ 86 x 190 x 0.12 mm
Display	7" Touch Screen
Barcode Reader	2D Barcode, supports both 1D and 2D documents
Client Printer	Thermal 58 mm
Lock Security Grade	Lock-1, Class B Lock-2, Mechanical
Security Bag	Impulse Sealing Canvas Bag
Interface	LAN
Options	UL291 / CEN III / CEN IV Safe
Power Supply	AC100V ~ 240V, 50/60Hz
Consumption	Idle 50W / Max. 1400W
Dimension	514 x 436 x 908 mm
Net Weight	Approx. 242 -419 lbs (110 ~ 190 kg)